

**DC VOLTAGE 20KV TO 150KV**  
**POWER UP TO 2KW**



SR serie is designed to offer optimal performance in a compact design. Dry isolated, SR Power Supplies from 20kV to 150kV provide high reliability without special maintenance.

## APPLICATIONS

- Pulsed applications
- Research and Development
- Test equipment
- Particle Accelerators
- Beams (electron-ion)
- Tubes

## MAIN SPECIFICATION

- Output voltage: 20kV to 150kV
- Output power: 300W to 2000W
- Polarity: positive-negative-reversible
- Rise-time (10-90%): <300ms
- Ripple+Noise: 0.1% RMS of max output voltage
- Remote interface: 0-10V analog

**TECHNICAL SPECIFICATIONS**

FORMAT	3U 19" Rack, 480mm depth (600mm depth over 100kV)
EFFICIENCY	> 90% at full load
MAINS INPUT	170 V to 255 VAC, 47-63 Hz Single Phase Earth
INPUT POWER FACTOR	≥ 0.98 at full load
INRUSH CURRENT	Limited to operating current at full power
REGULATION MODES	Constant Voltage (CV) and Constant Current (CC) regulations, automatic crossover. Power regulation on demand.
STATIC LOAD REGULATION	±0.05% of full voltage or current, from no load to full load (lower on demand)
STATIC LINE REGULATION	±0.05% of full voltage or current for ±10% mains voltage (lower on demand)
STABILITY (AFTER 1-HOUR WARM-UP)	100 ppm/hour, 300ppm/8 hours operating at constant load and temperature
PROTECTIONS	Short circuit, Arc quench, External interlock, Over temperature, Overload, Over voltage, Over current
STORED ENERGY	1 J/kW
ACCESSORIES	3m removable coaxial HV cable, interlock terminator, 2 safety keys, CE22 power cord for mains connection (for 300W to 1200W models), CE19 power cord for mains connection (for 2000W models)

**CONTROL**

LOCAL CONTROLS	Mains power switch, safety lock, HV on, HV off, Over current mode, Preset, Limitation of voltage setting
OUTPUT VOLTAGE AND CURRENT SETTING	10 turn potentiometer (0.05% resolution) Continuously adjustable from 0 to 100%
VOLTAGE AND CURRENT DISPLAY	4.5 Digit
STATUS INDICATORS	HV on, HV off, Line, Fault, Interlock, Remote, Over current limitation/protection, Regulation mode
REMOTE CONTROL INTERFACE	0-10V Analog On demand: RS-232, Ethernet, 0-10V Isolated Analog, 0-10V Analog with 24V relay, Optical fiber
REMOTE CONTROL SOFTWARE	On demand Labview


**OPERATING ENVIRONMENT**

AMBIENT TEMPERATURE	From 0 to 50 °C
AMBIENT HUMIDITY	0 to 80% at 25°C, 50% at 40°C (non-condensing)
TEMPERATURE COEFFICIENT	100 ppm/°C
COOLING	Air forced Inlet through front panel (dust filters) Outlet at rear panel

**STANDARDS AND REGULATIONS**


CE CERTIFIED AND ACCORDING	<p>Low voltage directive: 2014/35/EU</p> <p>EMC directive: 2014/30/EU</p> <p>RoHS directive: 2011/65/EU</p> <p>EN 61000-6-2: 2019</p> <p>EN 61000-6-4: 2019</p> <p>EN 61326-1: 2021</p> <p>EN 61000-3-2: 2019</p> <p>EN 61000-3-3: 2013 + A1: 2019</p> <p>EN 61010-1: 2010 + A1: 2019</p> <p>EUROLAB EMC decision n°11: issue 1 of 18 of December 2007</p>
----------------------------	--

**DOCUMENTATIONS AND SERVICES**

DOCUMENTATIONS	<p>User manual</p> <p>Test report</p> <p>EU declaration of conformity <b>CE</b></p> <p>RoHS2 declaration of conformity </p>
WARRANTY	<p>2 years</p> <p>Extension on demand</p>
ON DEMAND	<p>Witnessed Factory Acceptance Test (FAT)</p> <p>Detailed design report</p> <p>Custom tests</p> <p>Manufacturing process certification</p> <p>Special engineering, e.g. reverse voltage protection, plasma application</p>

### INTERFACES


#### FRONT PANEL

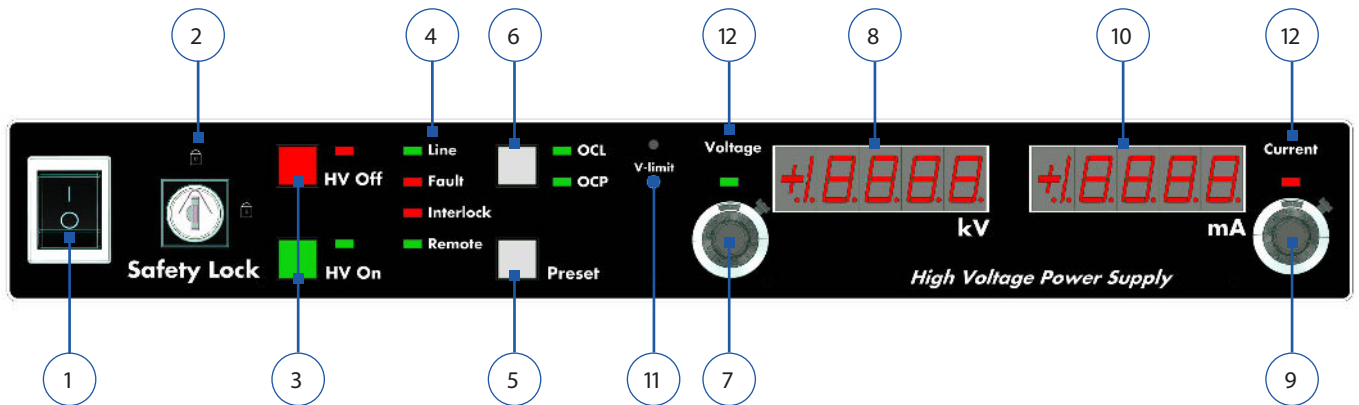

- |                          |   |                                      |
|--------------------------|---|--------------------------------------|
| 1. ON/OFF switch         | 4. Status (Line, Fault, Interlock, Remote)                        | 8. Voltage display                   |
| 2. Safety lock (key)     | 5. Preset push button   | 9. Current setting                   |
| 3. HV ON/OFF push button | 6. Over Current Limitation (OCL)<br>Over Current Protection (OCP) | 10. Current display                  |
|                          | 7. Voltage setting  | 11. Local voltage setting limitation |
|                          |   | 12. Regulation mode                  |

#### REAR PANEL

1. HV output
2. Analog interface
3. Mains input
4. Earth bolt
5. RS-232 (option)
6. Optical fiber (option)
7. Ethernet (option)

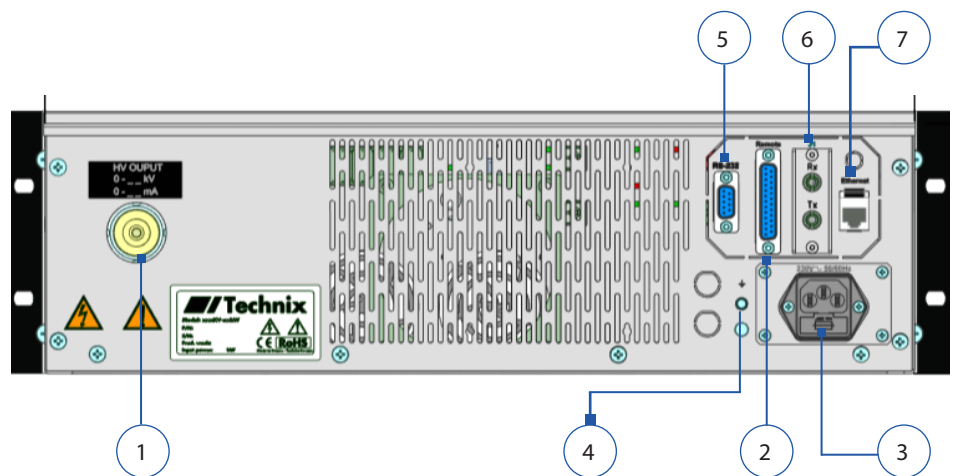

**0-10V ANALOG INTERFACE**

PIN	SIGNAL	SIGNAL DESCRIPTION	I/O	IMPEDANCE
1	HV-Off control	Produced by a fleeting opening from pin 16	Input	20Ω
2	Fault status	Internal Fault: 0V = Detected; +15V = No fault	Output	100Ω
3	Interlock status	External interlock: 0V = Open; +15V = Closed	Output	475Ω
4	HV-On control	Produced by a fleeting closing to pin 16	Input	20Ω
5	Output voltage measurement	0V to 10V = 0% to 100%	Output	475Ω
6	Output current measurement	0V to 10V = 0% to 100%	Output	475Ω
7	Inhibit control	Activated by digital signal between +5V to +24V	Input	
8	Remote control	Open contact = Local control mode Closed contact = Remote control mode	Input	20Ω
9	Not connected			
10	Arc monitor (Mains Monitor for older models)	Generates a signal when an arc is detected: +15V = No arc; 0V = Arc detected Older models (shipped before January 2023): Generates a fault if the mains input is failing: 0V = Mains is fine; +15V = Mains is failing	Output	100Ω
11	Output power measurement (option)	0V to 10V = 0% to 100% (option)	Output	475Ω
12	Local output voltage setting	Copy of the setting on the front panel potentiometer. 0V to 10V = 0% to 100%	Output	10Ω
13	Local output current setting	Copy of the setting on the front panel potentiometer. 0V to 10V = 0% to 100%	Output	10Ω
14	Remote output current setting	0V to 10V = 0% to 100%	Input	115Ω
15	+10V reference	+10V reference for analog signals, max current : 5mA	Output	2.7Ω
16	0V reference (digital signals)	0V ground reference for digital signals	Output	
17	Remote output voltage setting	0V to 10V = 0% to 100% of max output voltage	Input	115Ω
18	Regulation mode status or End of Charge status	DC power supply: Open contact = Current Regulation; +24V = Voltage Regulation CC power supply: Open contact = Capacitor charging; +24V = End of charge	Output	100Ω
19	HV-On status	0V = HV output disabled (HV Off) +15V = HV output enabled (HV On)	Output	100Ω
20	0V reference (analog signals)	0V ground reference for analog signals	Output	
21-22-23	Not connected			
24	External Interlock	Connect to pin 16 to close the interlock.	Input	500Ω
25	+10V Reference or Remote output power setting (option)	Standard: +10V reference for analog signals, max current : 5mA Option: 0V to 10V = 0% to 100% of max output power	Output	2.7Ω or 115Ω

## OPTIONS

- Reversibility
- Arc management
- Parallel operation
- Custom remote interface
- Zero floating
- Emergency stop switch
- Adjustable rise time
- Special mains input
- Non instrumented front panel
- Industrial dust filters
- Remote front panel
- Power regulation
- Tropicalization
- Custom design

## RANGE

**MODEL REFERENCE:** SR 20 kV to 150 kV - 300 W to 2 kW

VOLTAGE

POWER

OUTPUT POWER	300 W	600 W	1.2 kW	2 kW
OUTPUT VOLTAGE	Max Current			
20 kV	15 mA	30 mA	60 mA	10 mA
30 kV	10 mA	20 mA	40 mA	70 mA
40 kV	7.5 mA	15 mA	30 mA	50 mA
50 kV	6 mA	12 mA	24 mA	40 mA
60 kV	5 mA	10 mA	20 mA	30 mA
80 kV	3.75 mA	7.5 mA	15 mA	25 mA
100 kV	3 mA	6 mA	12 mA	20 mA
120 kV	Contact us			
150 kV	Contact us			

### DIMENSIONS

MODEL 3U - 19" : 133 x 483 x ( 480 mm or 600 mm)(H x W x D)

